



## Battery Installation Guide

### Step 1

Make sure connector cover is in the "OFF" position and screwed in place. If so, proceed to Step 4.




### Step 2

Find the jumper on the back of the connector cover and align the connector cover with the **SMARTONE** so it is in the "OFF" Position.



### Step 3


Make sure the jumper covers the 6th set of pins from the left and gently push the cap on until it is flush with the unit. Be sure to screw the connector cover in place to insure the jumper is completely engaged.

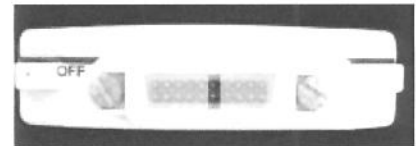

### Step 4


Unscrew the six flat-head screws on the Battery Compartment Cover.

*Note: New units are shipped with the mounting bracket screws stored in the battery compartment. Please remove screws before installing batteries.*



### Step 5

Remove the cover and add or replace batteries. Make sure to use 1.5v Lithium AA batteries and insert them as instructed on the battery Compartment. Make sure the black gasket surrounding the Battery Compartment lays flat in its groove before replacing the Battery Compartment Cover.

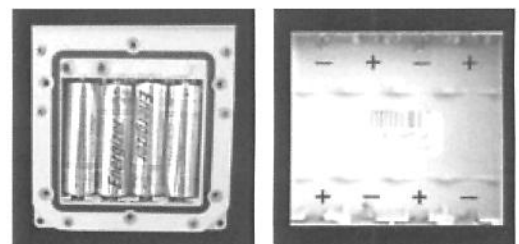

### Step 6

Replace the cover and screw all 6 flat-head screws. **DO NOT OVERTIGHTEN SCREWS.** Tighten to 36 In-Oz (Torque Setting).

*Note: The battery life will be negatively effected if the unit is mounted in a way that does not provide a clear line-of-site to the sky.*

